

**MOULDin Oy**

## Pantavastukset



**MOULDin Oy**

Museotie 4 | 29600 Noormarkku | +358 2 6384 999 | fax. +358 2 6384 998 | info@mouldin.fi | www.mouldin.fi

# MOULDin Oy

d	b	P [w]		
		DH 200	DH 400	DH 600
25	20	90	90	-
	22	-	-	200
	25	100	100	200
	30	140	140	250
28	20	100	100	-
	25	100	100	-
	30	140	140	-
30	20	100	100	-
	22	-	-	200*
	25	120	120	250
	30	160	160	300*
	40	240	240	350
	45	250	-	-
	50	250	250	500
	60	300	-	500
32	30	180	180	300
35	20	120	120	-
	22	-	-	250*
	25	150	150	300
	30	180	180	350
	40	240	240	400
	45	250	-	500
	50	270	270	500
	60	320	-	600
40	20	160	160	-
	22	-	-	250*
	25	180	180	300
	30	250	250	350
	35	270	270	400
	40	300	300	400*
	45	320	-	500
	50	350	350	600
	55	370	-	-
	60	400	400	800
42	20	160	160	-
	22	-	-	250
	30	250	250	350
	40	300	300	400*
45	20	180	180	-
	22	-	-	300
	25	200	200	350
	30	250	250	400*
	35	270	270	450
	40	320	320	500
	45	350	-	600
	50	400	400	700
	55	420	-	700
	60	450	450	800
80	65	500	-	-
	70	550	550	-
	80	650	-	-
	80	650	-	-

d	b	P [w]		
		DH 200	DH 400	DH 600
48	20	180	180	-
	22	-	-	-
	25	200	200	-
	30	270	270	-
	35	300	300	-
	40	320	320	-
	45	350	-	-
	50	420	420	-
	55	430	-	-
	60	450	450	-
50	20	180	180	-
	22	-	-	350
	25	210	210	400
	30	270	270	500*
	34*	310	310	500
	40	350	350	600*
	45	370	-	-
	50	430	430	600
	55	450	-	-
	60	500	500	750
55	20	200	200	-
	22	-	-	300
	25	240	240	450
	30	320	320	500
	35	350	350	500
	40	400	400	650
	45	440	-	-
	50	480	480	650
	55	500	-	-
	60	550	550	800
58	20	200	200	-
	25	250	250	-
	30	320	320	-
	35	350	350	-
	40	400	400	-
	45	440	-	-
	50	480	480	-
	55	500	-	-
60	20	210	210	-
	22	-	-	350
	25	260	260	400
	30	350	350	500*
	35	350	350	500*
	40	400	400	600*






d	b	P [w]		
		DH 200	DH 400	DH 600
60	35	370	370	600
	40	450	450	650
	45	480	-	-
	50	520	520	800
	55	550	-	-
	60	600	600	800
	65	650	-	-
	70	700	700	-
	80	800	-	-
	65	20	270	270
22		-	-	400
25		300	300	500
30		370	370	500
35		400	400	500
40		450	450	650
45		480	-	-
50		520	520	700
55		550	-	-
60		600	600	800
70	20	200	200	-
	22	-	-	400
	25	280	280	550
	30	400	400	650
	35	420	420	750
	40	500	500	800*
	45	550	-	-
	50	600	600	800
	55	650	-	-
	60	720	720	800
75	20	230	230	-
	22	-	-	450
	25	300	300	550
	30	450	450	650
	40	550	550	800
	45	550	-	-
	50	600	600	800
	55	650	-	-
	60	750	750	800
	65	750	-	-
80	20	320	320	-
	22	-	-	450
	25	340	340	600
	30	450	450	600
	40	550	550	800
	45	600	-	-
	50	650	650	800
	55	650	-	-
	60	750	750	800
	65	750	-	-

d	b	P [w]		
		DH 200	DH 400	DH 600
80	60	800	800	1000
	65	800	-	-
	70	850	850	-
	80	900	-	-
85	20	300	300	-
	22	-	-	-
	25	340	340	-
	30	500	500	-
	40	600	600	-
	45	650	-	-
	50	700	700	-
	55	750	-	-
	60	900	900	-
	65	900	-	-
90	20	300	300	-
	22	-	-	500
	25	350	350	700
	30	500	500	700
	40	600	600	800
	45	650	-	-
	50	700	700	900
	55	750	-	-
	60	900	900	1000
	65	900	-	-
100	20	300	300	-
	22	-	-	600
	25	350	350	650
	30	550	550	800
	40	700	700	900
	45	750	-	-
	50	800	800	1000
	55	850	-	-
	60	900	900	1100
	65	950	-	-
110	20	300	300	-
	22	-	-	650
	25	350	350	650
	30	550	550	800
	40	700	700	900
	45	750	-	-
	50	800	800	1000
	55	850	-	-
	60	900	900	1000
	65	950	-	-

\* = Kaapeli 800 mm  
Typ 1, 45°

# MOULDin Oy

Tyyppi	DH 200	DH 400	DH 600
Materiaali	Messinki	Ruostumaton teräs	Ruostumaton teräs
Eriste	Mica		MgO
Käyttölämpötila, max °C	300	350	600

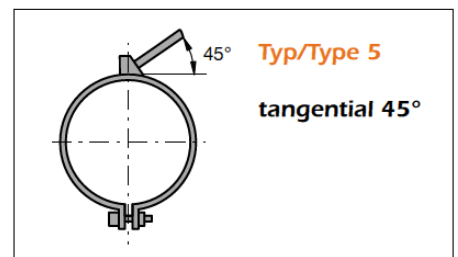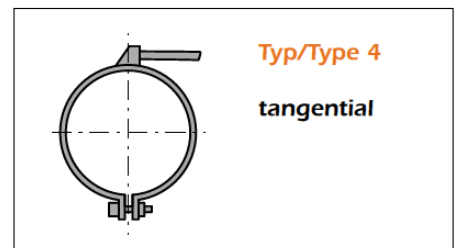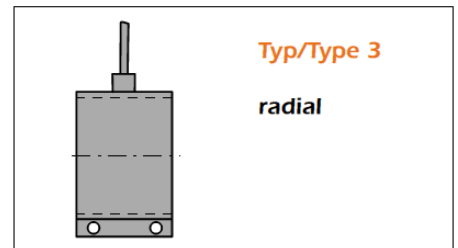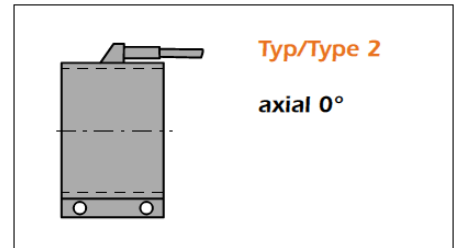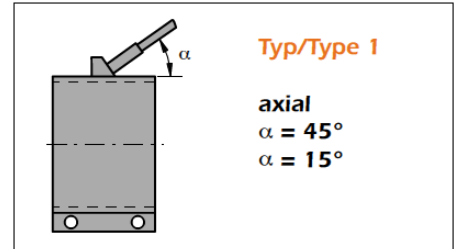

Muut mitat ja versiot kyselyiden perusteella

Haluttaessa myös sisäänrakennetulla anturilla